

USER'S MANUAL

ProX-B501

**Pentium® M
Flex-ATX Motherboard
With VGA/Sound/2LAN**

ProX-B501 M2

***Prox-B501 Pentium® M
Flex-ATX Motherboard
With VGA/ Sound/ 2LAN***

OPERATION MANUAL

COPYRIGHT NOTICE

This operation manual is meant to assist both Embedded Computer manufacturers and end users in installing and setting up the system. The information contained in this document is subject to change without any notice.

This manual is copyrighted in May, 2004. You may not reproduce or transmit in any form or by any means, electronic, or mechanical, including photocopying and recording.

ACKNOWLEDGEMENTS

All trademarks and registered trademarks mentioned herein are the property of their respective owners.

CE NOTICE

This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

FCC NOTICE

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

You are cautioned that any change or modifications to the equipment not expressly approve by the party responsible for compliance could void your authority to operate such equipment.



TABLE OF CONTENTS

CHAPTER 1 INTRODUCTION

1-1	About This Manual	1-2
1-2	System Specification	1-3
1-3	Safety Precautions	1-6

CHAPTER 2 HARDWARE CONFIGURATION

2-1	Jumper & Connector Quick Reference Table	2-2
2-2	Component Locations	2-3
2-3	How to Set the Jumpers	2-4
2-4	COM Port Connector	2-6
2-5	COM3 RI& Voltage Selection	2-8
2-6	COM4 RI& Voltage Selection	2-9
2-7	RS232/422/485(COM2) Selection	2-10
2-8	Keyboard or PS/2 Mouse Connector	2-11
2-9	Reset Connector	2-11
2-10	Hard Disk Drive LED Connector	2-11
2-11	ATX Power Button	2-12
2-12	External Speaker Connector	2-12
2-13	Power Led Connector	2-12
2-14	KeyLock Connector	2-13
2-15	External SMI Connector	2-13
2-16	Inverter Connector	2-13
2-17	Clear CMOS Data Selection	2-14
2-18	CPU Fan Connector	2-14
2-19	System Fan Connector	2-15
2-20	VGA Connector	2-15
2-21	Hard Disk Drive Connector	2-16
2-22	Floppy Disk Drive Connector	2-18
2-23	Printer Connector	2-19
2-24	Universal Serial Bus Connector	2-20
2-25	IrDA Connector	2-20
2-26	USB & LAN Connector	2-21
2-27	GigaLAN (LAN2) Enable/Disable Selection	2-23
2-28	Memory Installation	2-24
2-29	LVDS Connector	2-24

2-30	ATX Power Connector	2-25
2-31	Sound Connector	2-26
2-32	CD Audio-in Connector	2-27
2-33	LVDS Panel Voltage Selection	2-27
2-34	LVDS Brightness & Backlight Control Connector	2-27

CHAPTER 3 SOFTWARE UTILITIES

3-1	Introduction	3-2
3-2	VGA Driver Utility	3-3
3-3	Flash BIOS Update	3-4
3-4	LAN Driver Utility	3-6
3-5	Sound Driver Utility	3-7
3-6	Intel Chipset Software Installation Utility	3-8
3-7	USB2.0 Software Installation Utility	3-9

CHAPTER 4 AWARD BIOS SETUP

4-1	Introduction	4-2
4-2	Entering Setup	4-3
4-3	The Standard CMOS Features	4-4
4-4	The Advanced BIOS Features	4-8
4-5	Advanced Chipset Features	4-11
4-6	Integrated Peripherals	4-13
4-7	Power Management Setup	4-18
4-8	PNP/PCI Configuration	4-21
4-9	PC Health Status	4-23
4-10	Frequency Control	4-24
4-11	Load Fail-Safe Defaults	4-25
4-12	Load Optimized Defaults	4-25
4-13	Password Setting	4-26
4-14	Save & Exit Setup	4-27
4-15	Exit Without Saving	4-28

APPENDIX A EXPANSION BUS

PCI Bus Pin Assignment	A-2
AGP Bus Pin Assignment	A-3

APPENDIX B TECHNICAL SUMMARY

Block Diagram	B-2
Interrupt Map	B-3
RTC & CMOS RAM Map	B-4
Timer & DMA Channels Map	B-5
I/O & Memory Map	B-6

INTRODUCTION

CHAPTER

1

This chapter gives you the information for Prox-B501. It also outlines the System specifications.

Section includes:

- About This Manual
- System Specifications
- Safety Precautions

Experienced users can skip to chapter 2 on page 2-1 for a Quick Start.

1-1. ABOUT THIS MANUAL

Thank you for purchasing our Prox-B501 Socket 478 Mainboard enhanced with VGA/Sound/2LAN, which is fully PC / AT compatible. The Prox-B501 provides faster processing speed, greater expandability and can handle more tasks than before. This manual is designed to assist you how to install and set up the system. It contains four chapters. The user can apply this manual for configuration according to the following chapters:

Chapter 1 Introduction

This chapter introduces you to the background of this manual, and the specifications for this system. The final page of this chapter will indicate how to avoid damaging this board.

Chapter 2 Hardware Configuration

This chapter outlines the component locations and their functions. In the end of this chapter, you will learn how to set jumper and how to configure this card to meet your own needs.

Chapter 3 Software Utilities

This chapter contains helpful information for proper installations of the VGA utility, LAN utility, Sound utility, and Flash BIOS Update. It also describes the Watchdog-timer configuration.

Chapter 4 Award BIOS Setup

This chapter indicates you how to set up the BIOS configurations.

Appendix A Expansion Bus

This Appendix introduces you the expansion bus for AGP BUS and PCI BUS.

Appendix B Technical Summary

This section gives you the information about the Technical maps.

Appendix C Trouble Shooting

This section outlines the error messages and offers you the methods to solve the problems.

1-2. SYSTEM SPECIFICATIONS

- **CPU (mPGA478):**

- Intel® Pentium® M / Celeron M Type processor in mPGA478 Socket.
- 1.3~1.8 GHz clock generator.
- Front Side Bus 400 MHZ.
- Auto detect voltage regulator.

- **MEMORY :**

- Supports up to 2GB DDR SDRAM.
- Two 184-pin DDR DIMM sockets on board.

- **CACHE :**

- Built-in CPU.

- **REAL-TIME CLOCK :**

- 256-byte battery backed CMOS RAM.
- Hardware implementation to indicate century rollover.

- **BIOS :**

- Phoenix-AwardBIOS™ for plug & play function.
- 4/8MB with VGA BIOS.
- Easy update 512KB flash EEPROM.
- Support S/IO Setup.

- **KEYBOARD CONNECTOR :**

- Mini DIN connector.
- Supports for AT/PS2 keyboard.

- **MOUSE CONNECTOR :**

- Mini DIN connector.
- Supports for PS/2 Mouse.

- **BUS SUPPORT :**

- External 2 PCI, 1 AGP Bus

● **DISPLAY :**

Built-in Intel 855GME/GM, support for CRT, DVO and LVDS.
Onboard 15-pin VGA D-SUB connector, support for resolution on SVGA Monitor.

● **IDE INTERFACE :**

Two IDE ports support up to four IED devices.
Supports Ultra DMA 33/66/100.

● **FLOPPY DISK DRIVER INTERFACE :**

Support up to two Floppy Disk Drives, 3.5" and 5.25" (360K / 720K / 1.2M / 1.44M / 2.88M).

● **USB CONNECTOR :**

Support up to six USB 2.0 ports.

● **LAN ADAPTER :**

Dual ports, Intel® 82562EM PHY & Intel 82540EM (10/100/1000)
LAN1: 10BaseT/100 BaseTx Ethernet
LAN2: 10/100/1000 BaseT (82540EM)
Support wake-on-LAN function.

● **SERIAL PORT :**

Four high speed 16550 Compatible UARTs with Send / Receive 16 Byte FIFOs; COM1/3/4:RS-232; COM2: RS-232/422/485
MIDI Compatible
Programmable Baud Rate Generator

● **SOUND :**

Realtek ALC202A (AC'97 Codec).
Fully Compliant AC'97 Analog I/O Component
16-Bit Stereo Full-Duplex Codec
Four Analog Line-level Stereo Inputs for Connection.
High Quality CD Input with Ground Sense
Stereo Line-Level Output
Interface: Line-In, Line-Out, Microphone, and CD Audio-In.

- **HARDWARE MONITORING FUNCTION :**

Monitor Voltage, CPU temperature, & Cooling fan.

If CPU Temperature is over setting, the buzzer will send out a warning (only under DOS system).

- **IRDA PORT :**

5-pin Infrared port, support IrDA v1.0 SIR protocol

- **PARALLEL PORT :**

SPP / ECP / EPP Function.

1 port, bi-directional parallel port.

- **GREEN FUNCTION :**

Controlled by hardware and software.

- **LED INDICATOR :**

System power

Hard Disk access

LAN LED indicator

- **DMA CONTROLLER :**

82C37 x 2

- **DMA CHANNELS :**

7

- **INTERRUPT CONTROLLERS :**

82C59 x 2

- **INTERRUPT LEVELS :**

15

- **OPERATING TEMPERATURE :**

0 to 60°C.

- **BOARD DIMENSIONS :**

228.6mm x 190.5mm, 9" x 7.5"

- **BOARD NET WEIGHT :**

490 gram.

1-3. SAFETY PRECAUTIONS

Follow the messages below to avoid your systems from damage:

1. Keep your system away from static electricity on all occasions.
2. Prevent electric shock. Don't touch any components of this card when the card is power-on. Always disconnect power when the system is not in use.
3. Disconnect power when you change any hardware devices. For instance, when you connect a jumper or install any cards, a surge of power may damage the electronic components or the whole system.

HARDWARE CONFIGURATION

CHAPTER

2

***** QUICK START *****

Helpful information describes the jumper & connector settings, and component locations.


Section includes:

- Jumper & Connector Quick Reference Table
- Component Locations
- Configuration and Jumper settings
- Connector's Pin Assignments

2-1. JUMPER & CONNECTOR QUICK REFERENCE TABLE

COM Port Connector	COM1, COM2 COM3, COM4
COM3 Port RI/Voltage Selection	JP1
COM4 Port RI/Voltage Selection	JP3
RS232/422/485 (COM2) Selection	JP5
Keyboard/Mouse Connector	JKBMS1
Reset Connector	JPANEL (13,15)
Hard Disk Drive LED Connector	JPANEL (9,11)
ATX Power Button	JPANEL (14,16)
External Speaker Connector	JPANEL (1,3,5,7)
Power LED Connector	JPANEL (8,10,12)
KeyLock Connector	JPANEL (17,18)
External SMI Connector	JPANEL (2, 4)
Inverter Connector	J3
Clear CMOS Data Selection	JP12
CPU Fan Connector	JCFAN1
System Fan Connector	JSFAN1
VGA Connector	VGA
Hard Disk Drive Connector	IDE1, IDE2
Floppy Disk Drive Connector	FDD1
Printer Connector	LPT1
Universal Serial Bus Connector	JUSB1
IrDA Connector	IRDA1, JPANEL (21-24)
USB&LAN Connector	J1, J2
GigaLAN (LAN2) Enable/Disable Selection	JP2
ATX Power Connector	PW1
Memory Installation	DIMM1, DIMM2
LVDS Connector	J4
Sound Connector	JAUDIO1
CD Audio-In Connector	JCDIN1
LVDS Voltage Selection	JP9
LVDS Brightness & Backlight Control Connector	J5
Reserved Pin	J7, JP8,

2-2. COMPONENT LOCATIONS

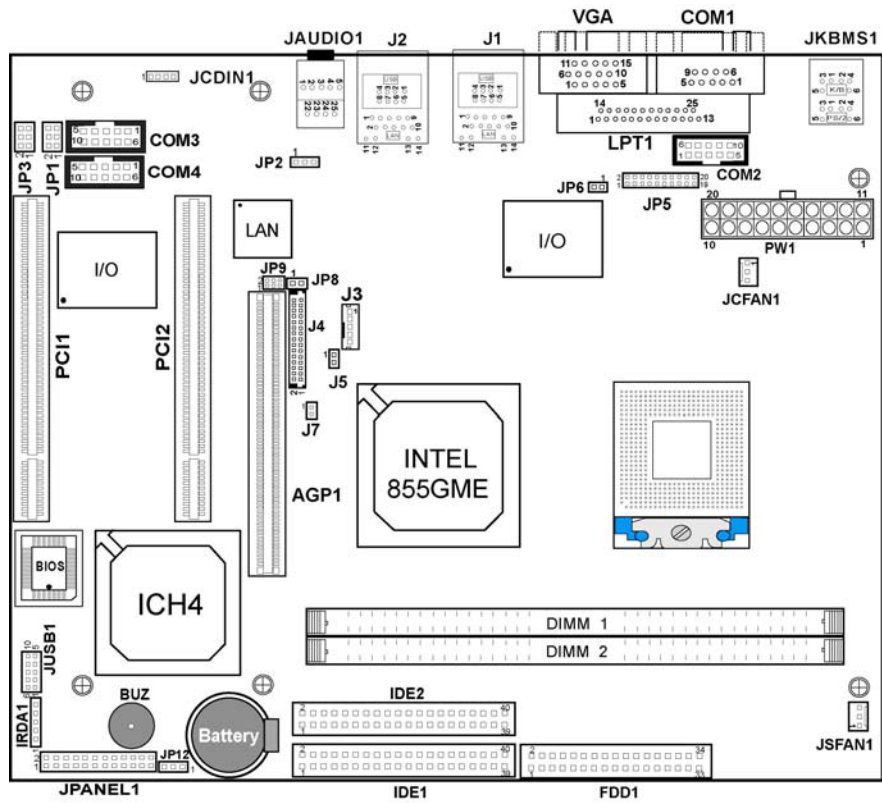


Prox-B501 Connector, Jumper and Component locations

2-3. HOW TO SET THE JUMPERS

You can configure your board by setting jumpers. Jumper is consists of two or three metal pins with a plastic base mounted on the card, and by using a small plastic "cap", Also known as the jumper cap (with a metal contact inside), you are able to connect the pins. So you can set-up your hardware configuration by "open" or "close" pins.

The jumper can be combined into sets that called jumper blocks. When the jumpers are all in the block, you have to put them together to set up the hardware configuration. The figure below shows how this looks like.

JUMPERS AND CAPS

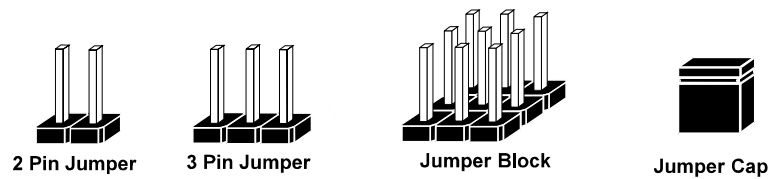


If a jumper has three pins (for examples, labelled PIN1, PIN2, and PIN3), You can connect PIN1 & PIN2 to create one setting and shorting. You can either connect PIN2 & PIN3 to create another setting. The same jumper diagrams are applied all through this manual. The figure below shows what the manual diagrams look and what they represent.


JUMPER DIAGRAMS




Jumper Cap
looks like this




2 pin Jumper
looks like this



3 pin Jumper
looks like this



Jumper Block
looks like this




JUMPER SETTINGS




2 pin Jumper close(enabled)
Looks like this



3 pin Jumper
2-3 pin close(enabled)
Looks like this



Jumper Block
1-2 pin close(enabled)
Looks like this




2-4. COM PORT CONNECTOR

COM1 : COM1 Connector

COM1 is fixed as RS-232.

The pin assignment is as follows :




COM1

PIN	ASSIGNMENT
1	DCD
2	RX
3	TX
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	RI
10	NC

COM2 : COM2 Connector

The COM2 is selectable as RS-232/422/485.

The pin assignment is as follows :



COM2


PIN	ASSIGNMENT		
	RS-232	RS-422	RS-485
1	DCD	TX-	TX-
2	RX	TX+	TX+
3	TX	RX+	RX+
4	DTR	RX-	RX-
5	GND	GND	GND
6	DSR	RTS-	NC
7	RTS	RTS+	NC
8	CTS	CTS+	NC
9	RI	CTS-	NC
10	NC	NC	NC

COM3 : COM3 Connector

COM3 is fixed as RS-232.

The pin assignment is as follows :

PIN	ASSIGNMENT
1	DCD
2	RX
3	TX
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	RI-V
10	NC




COM3

COM4 : COM4 Connector

COM4 is fixed as RS-232.

The pin assignment is as follows :




PIN	ASSIGNMENT
1	DCD
2	RX
3	TX
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	RI-V
10	NC



COM4

2-5. COM3 RI & VOLTAGE SELECTION




JP1 : COM3 RI & Voltage Selection
The selections are as follows:

SELECTION	JUMPER SETTINGS	JUMPER ILLUSTRATION
RI	1-2	 JP1
+12V	3-4	 JP1
+5V	5-6	 JP1

***Manufacturing Default – RI.

2-6. COM4 RI & VOLTAGE SELECTION

JP3 : COM4 RI & Voltage Selection
The selections are as follows:

SELECTION	JUMPER SETTINGS	JUMPER ILLUSTRATION
RI	1-2	 <p>JP3</p>
+12V	3-4	 <p>JP3</p>
+5V	5-6	 <p>JP3</p>




***Manufacturing Default – RI.

2-7. RS232/422/485 (COM2) SELECTION

JP5 : RS-232/422/485 (COM2) Selection

This connector is used to set the COM2 function.

The jumper settings are as follows :

COM 2 Function	Jumper Settings (pin closed)	Jumper Illustrations
RS-232	Open	 <p>JP5</p>
RS-422	1-2, 5-6, 7-8 9-10, 11-12, 13-14 15-16, 17-18, 19-20	 <p>JP5</p>
RS-485	1-3, 4-6, 7-8, 9-10 11-12, 13-14, 15-16 17-18, 19-20	 <p>JP5</p>


*** Manufactory default --- RS-232.

2-8. KEYBOARD OR PS/2 MOUSE CONNECTOR

JKBMS1 : Keyboard or PS/2 Mouse Connector

DIN connector can support keyboard, Y-cable, or PS/2 Mouse, user may select the right device to used on “Keyboard or PS/2 Mouse Selection”. The pin assignments are as follows :

PIN	ASSIGNMENT	
	Keyboard	PS/2 Mouse
1	KBDATA	MSDATA
2	MSDATA	MSDATA
3	GND	GND
4	+5V	+5V
5	KBCLK	MSCLK
6	MSCLK	MSCLK




2-9. RESET CONNECTOR

JPAENL (13,15) : Reset Connector.

The pin assignment is as follows :

PIN	ASSIGNMENT
13	GND
15	RST_SW




2-10. HARD DISK DRIVE LED CONNECTOR

JPAENL (9,11) : Hard Disk Drive LED Connector

The pin assignment is as follows :


PIN	ASSIGNMENT
9	+5V
11	HD_LED



2-11. ATX POWER BUTTON

JPANEL (14,16) : ATX Power Button
The pin assignment is as follows :


PIN	ASSIGNMENT
14	PWR_BN1
16	PWR_BN2



2-12. EXTERNAL SPEAKER CONNECTOR

JPANEL (1,3,5,7) : External Speaker Connector
The pin assignment is as follows :


PIN	ASSIGNMENT
1	+5V
3	NC
5	NC
7	SPEAKER SIGNAL



2-13. POWER LED CONNECTOR

JPAENL (8,10,12) : Power LED Connector
The pin assignment is as follows:


PIN	ASSIGNMENT
8	PW_LED
10	PW_LED
12	GND



2-14. KEYLOCK CONNECTOR

JPAENL (17,18) : Keylock Connector
The pin assignment is as follows:


PIN	ASSIGNMENT
17	KEYLOCK
18	GND



2-15. EXTERNAL SMI CONNECTOR

JPAENL (2,4) : External SMI Connector
The pin assignment is as follows:

PIN	ASSIGNMENT
2	5VSB
4	GND



2-16. INVERTER CONNECTOR

J3 : Inverter Connector
The pin assignment is as follows:



PIN	ASSIGNMENT
1	+12V
2	GND
3	+5V
4	GND
5	ENABKL (Inverter backlight ON/OFF control signal)



2-17. CLEAR CMOS DATA SELECTION

JP12 : Clear CMOS Data Selection

The selections are as follows :

FUNCTION	JUMPER SETTING (pin closed)	JUMPER ILLUSTRATION
Normal	1-2	 1 JP12
Clear CMOS	2-3	 1 JP12

*** Manufacturing Default is set as Normal.


Note: To clear CMOS data, user must power-off the computer and set the jumper to "Clear CMOS" as illustrated above. After five to six seconds, set the jumper back to "Normal" and power-on the computer.

2-18. CPU FAN CONNECTOR

JCFAN1 : CPU Fan connector

The pin assignment is as follows:


PIN	ASSIGNMENT
1	GND
2	+12V
3	FAN1



2-19. SYSTEM FAN CONNECTOR

JSFAN1 : System Fan connector
The pin assignment is as follows:


PIN	ASSIGNMENT
1	GND
2	+12V
3	FAN0



2-20. VGA CONNECTOR

VGA : VGA CRT Connector
The pin assignments are as follows:


PIN	ASSIGNMENT
1	RED
2	GREEN
3	BLUE
4	NC
5	GND
6	GND
7	GND
8	GND
9	VCC
10	GND
11	NC
12	VGA DDA
13	HSYNC
14	VSYNC
15	VGA DDC CLK



2-21. HARD DISK DRIVE CONNECTOR

IDE1: Hard Disk Drive Connector

The Prox-B501 possesses two HDD connectors, IDE1 and IDE2. The pin assignments are as follows:



IDE1

PIN	ASSIGNMENT	PIN	ASSIGNMENT
1	IDERST	2	GND
3	PDD7	4	PDD8
5	PDD6	6	PDD9
7	PDD5	8	PDD10
9	PDD4	10	PDD11
11	PDD3	12	PDD12
13	PDD2	14	PDD13
15	PDD1	16	PDD14
17	PDD0	18	PDD15
19	GND	20	NC
21	PDREQ	22	GND
23	PDLOW#	24	GND
25	PDIOR#	26	GND
27	PIORDY	28	PULL LOW
29	PDDACK#	30	GND
31	IRQ14	32	NC
33	PDA1	34	P66 DETECT
35	PDA0	36	PDA2
37	PDCS#1	38	PDCS#3
39	IDEACTP#	40	GND

IDE2: Hard Disk Drive Connector

The pin assignments are as follows:



IDE2


PIN	ASSIGNMENT	PIN	ASSIGNMENT
1	IDERST	2	GND
3	SDD7	4	SDD8
5	SDD6	6	SDD9
7	SDD5	8	SDD10
9	SDD4	10	SDD11
11	SDD3	12	SDD12
13	SDD2	14	SDD13
15	SDD1	16	SDD14
17	SDD0	18	SDD15
19	GND	20	NC
21	SDREQ	22	GND
23	SDIOW#	24	GND
25	SDIOR#	26	GND
27	SIORDY	28	PULL LOW
29	SDDACK#	30	GND
31	IRQ15	32	NC
33	SDA1	34	S66 DETECT
35	SDA0	36	SDA2
37	SDCS#1	38	SDCS#3
39	IDEACTS#	40	GND

2-22. FLOPPY DISK DRIVE CONNECTOR

FDD1 : Floppy Disk Drive Connector

You can use a 34-pin daisy-chain cable to connect two-FDDs. On one end of this cable is a 34-pin flat cable to attach the FDD on the board, and the other side is attaches two FDDs.

The pin assignments are as follows :



FDD1


PIN	ASSIGNMENT	PIN	ASSIGNMENT
1	GND	2	RWC#
3	GND	4	NC
5	GND	6	DS1#
7	GND	8	INDEX
9	GND	10	MOA#
11	GND	12	DSB#
13	GND	14	DSA#
15	GND	16	MOB#
17	GND	18	DIR#
19	GND	20	STEP#
21	GND	22	WD#
23	GND	24	WE#
25	GND	26	TRK0#
27	GND	28	WP#
29	NC	30	RDATA#
31	GND	32	HEAD#
33	NC	34	DSKCHG

2-23. PRINTER CONNECTOR

LPT : Printer Connector

As to link the Printer to the card, you need a cable to connect both DB25 connector and parallel port.

The pin assignments are as follows :




LPT1

PIN	ASSIGNMENT	PIN	ASSIGNMENT
1	STB	14	AFD#
2	PDR0	15	ERROR#
3	PDR1	16	PAR_INIT#
4	PDR2	17	SLIN#
5	PDR3	18	GND
6	PDR4	19	GND
7	PDR5	20	GND
8	PDR6	21	GND
9	PDR7	22	GND
10	ACK#	23	GND
11	BUSY	24	GND
12	PE	25	GND
13	SLCT	26	NC

2-24. UNIVERSAL SERIAL BUS CONNECTOR

JUSB1: Universal Serial Bus Connector
The pin assignments are as follows:


PIN	ASSIGNMENT
1	+5V
2	+5V
3	USB0-
4	USB1-
5	USB0+
6	USB1+
7	GND
8	GND
9	NC
10	NC



2-25. IRDA CONNECTOR

IRDA1: IrDA (Infrared) Connector
The pin assignments are as follows:


PIN	ASSIGNMENT
1	+5V
2	NC
3	IRRX
4	GND
5	IRTX



JPAENL (21-24) : IrDA Connector

The pin assignment is as follows:

PIN	ASSIGNMENT
21	+5V
22	GND
23	IRTX2
24	IRRX2




2-26. USB&LAN CONNECTOR

J1: USB & LAN Connector

The pin assignments are as follows:

LAN:

PIN	ASSIGNMENT
1	TX+
2	TX-
3	RX+
4	ISOLATED GND
5	ISOLATED GND
6	RX-
7	ISOLATED GND
8	ISOLATED GND
11	YLED+
12	YLED-
13	OLED+
14	OLED-



The green LED detect power link, and the Yellow LED is used to detect data active transfer signal.

USB:


PIN	ASSIGNMENT
A1	+5V
A2	USB0-
A3	USB0+
A4	GND
B1	+5V
B2	USB1-
B3	USB1+
B4	GND

J2: USB & LAN Connector

The pin assignments are as follows:

LAN:

PIN	ASSIGNMENT
1	TX+
2	TX-
3	RX+
4	ISOLATED GND
5	ISOLATED GND
6	RX-
7	ISOLATED GND
8	ISOLATED GND
11	YLED+
12	YLED-
13	OLED+
14	OLED-



J2

⚠ The green LED detect power link, and the Yellow LED is used to detect data active transfer signal.



USB:

PIN	ASSIGNMENT
A1	+5V
A2	USB0-
A3	USB0+
A4	GND
B1	+5V
B2	USB1-
B3	USB1+
B4	GND

2-27. GIGALAN (LAN2) ENABLE/DISABLE SELECTION

JP2 : GigaLAN (LAN2) Enable/Disable Selection.

The selections are as follows:

FUNCTION	JUMPER SETTING (pin closed)	JUMPER ILLUSTRATION
Enable	1-2	 JP2
Disable	2-3	 JP2

2-28. MEMORY INSTALLATION

Prox-B501 CPU Card can support up to 2GB in two DIMM sockets.
DRAM BANK CONFIGURATION

DIMM 1	DIMM 2	TOTAL MEMORY
128MB	128MB	256MB
256MB	256MB	512GB
512MB	512MB	1GB
1GB	1GB	2GB

2-29. LVDS CONNECTOR

J4 : LVDS Connector.

The pin assignments are as follows:


PIN	ASSIGNMENT	PIN	ASSIGNMENT
1	LCD_VCC	2	GND
3	ZCM	4	ZCP
5	GND	6	Z2M
7	Z2P	8	GND
9	Z1M	10	Z1P
11	Z3P	12	Z3M
13	Z0P	14	Z0M
15	GND	16	YCP
17	YCM	18	GND
19	Y2P	20	Y2M
21	GND	22	Y1P
23	Y1M	24	GND
25	Y0P	26	Y0M
27	Y3P	28	Y3M
29	LCD_VCC	30	LCD_VCC



2-30. ATX POWER CONNECTOR

PW1 : ATX Power Connector

The pin assignments are as follows:



PIN	ASSIGNMENT
1	3.3V
2	3.3V
3	GND
4	5V
5	GND
6	5V
7	GND
8	POK
9	5VSB
10	12V
11	3.3V
12	-12V
13	GND
14	PSON
15	GND
16	GND
17	GND
18	-5V
19	5V
20	5V

2-31. SOUND CONNECTOR

JAUDIO1 : Sound Connector, including Line-In, Line-Out & Mic.
Also can support only MIC connector. The pin assignments are as follows :

Line-In


PIN	ASSIGNMENT
32	LINE_L
33	GND
34	GND
35	LINE_R

Line-Out

PIN	ASSIGNMENT
22	SPK-L
23	NC
24	NC
25	SPK-R

Mic-In

PIN	ASSIGNMENT
1	GND
2	MIC_IN
3	GND
4	NC

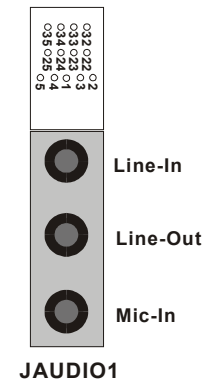


2-32. CD AUDIO-IN CONNECTOR

JCDIN1 : CD Audio-In Connector

The pin assignments are as follows:

PIN	ASSIGNMENT
1	CD L
2	GND
3	GND
4	CD R

**2-33. LVDS PANEL VOLTAGE SELECTION**

JP9 : LVDS Panel Voltage Selection.

The selections are as follows:


SELECTION	JUMPER SETTING	JUMPER ILLUSTRATION
LVDS_VCC3	1-3	 JP9
	2-4	
LVDS_VCC5	3-5	 JP9
	4-6	

2-34. LVDS BRIGHTNESS & BACKLIGHT CONTROL CONNECTOR

J5 : LVDS Brightness and Backlight Control Connector

The pin assignment is as follows:

PIN	ASSIGNMENT
1	Brightness Control
2	LCD Back Light Enable



SOFTWARE UTILITIES

CHAPTER 3

This chapter comprises the detailed information of VGA driver, LAN driver, and Flash BIOS update. It also describes how to install the watchdog timer configuration.

Section includes:

- VGA Driver Utility
- Flash BIOS Update
- LAN Driver Utility
- Sound Driver Utility
- Intel® Chipset Software Installation Utility
- USB2.0 Chipset Software Installation Utility

3-1. INTRODUCTION


Enclosed with our Prox-B501 package is our driver utility, which may comes in a form of a CD ROM disc or floppy diskettes. For CD ROM disc user, you will only need some of the files contained in the CD ROM disc, please kindly refer to the following chart:

Filename (Assume that CD ROM drive is D:)	Purpose
D:\VGA	Intel 855GME For VGA driver installation
D:\AWDFLASH	For BIOS update utility
D:\LAN	For LAN Driver installation
D:\SOUND	Realtek ALC202A AC97 For Sound driver installation
D:\UTILITY	Intel® Chipset Software Installation Utility For Win 98SE, ME, 2000, XP
D:\USB 2.0	USB 2.0 Software Installation Utility For Win 98SE, 2000, ME, XP

 User should remember to install the Utility right after the OS fully installed.

3-2. VGA DRIVER UTILITY

The VGA interface embedded with our Prox-B501 can support a wide range of display. You can display CRT, LVDS simultaneously with the same mode.

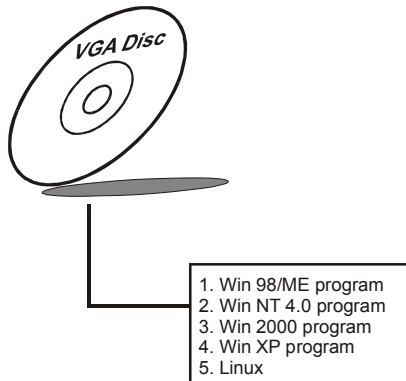

3-2-1. Installation of VGA Driver:

To install the VGA Driver, simply follow the following steps:

1. Place insert the Utility Disk into Floppy Disk Drive A/B or CD ROM drive.
2. Under Windows 9X/NT4.0/2000/XP system, go to the directory where VGA driver is located.
3. Click **Setup.exe** file for VGA driver installation.
4. Follow the instructions on the screen to complete the installation.
5. Once installation is completed, shut down the system and restart in order for the changes to take effect.

3-3. FLASH BIOS UPDATE

3-3-1. System BIOS Update:

Users of Prox-B501 can use the program “Awdflash.exe” contained in the Utility Disk for system BIOS and VGA BIOS update.

3-3-2. To update VGA BIOS for LCD Flat Panel Display:

As Prox-B501 user, you have to update the VGA BIOS for your specific LCD flat panel you are going to use. For doing this, you need two files. One is the “Awdflash.exe” file and the other is the VGA BIOS for ATI Rage Mobility M6 file for LCD panel display. Both file must be provided by the vendor or manufacturer. When you get these two files ready, follow the following steps for updating your VGA BIOS:

1. Install “Awdflash.exe” from Utility Disk to Drive C.
2. Insert the VGA BIOS file you have obtained from the vendor.
Type the path to Awdflash.exe and execute the VGA BIOS update with file H15bxxxx.bin
3. C:\UTIL\AWDFLASH>AWDFLASH H15bxxxx.bin
4. The screen will display as the table found on the next page:

FLASH MEMORY WRITER v7.XX (C) Award Software 2001 All Rights Reserved
Flash Type – SST 49LF004A /3.3V File Name to Program: H20bxxxx.bin Checksum: XXXXX
Error Message: Do You Want To Save BIOS (Y/N)

If you want to save up the original BIOS, enter "Y" and press < Enter >.
If you choose "N", the following table will appear on screen.

FLASH MEMORY WRITER v7.XX (C) Award Software 2001 All Rights Reserved
Flash Type – SST 49LF004A /3.3V File Name to Program: H20bxxxx.bin Checksum: XXXXX
Error Message : Are You Sure To Program (Y/N)

Select "Y", and the BIOS will be renewed. When you are refreshing the BIOS, do not turn off or reset the system, or you will damage the BIOS. After you have completed all the programming, the screen displays the table below:


FLASH MEMORY WRITER v7.XX (C) Award Software 2001 All Rights Reserved
Flash Type – SST 49LF004A /3.3V File Name to Program: H20bxxxx.bin Checksum: XXXXX Reset System or Power off to accomplish update process!
F1: Reset F10: Exit

Please reset or power off the system, and then the Flash BIOS is fully implemented.

3-4. LAN DRIVER UTILITY

3-4-1. Introduction

Prox-B501 is enhanced with LAN function that can support various network adapters. Installation programs for LAN drivers are listed as follows:

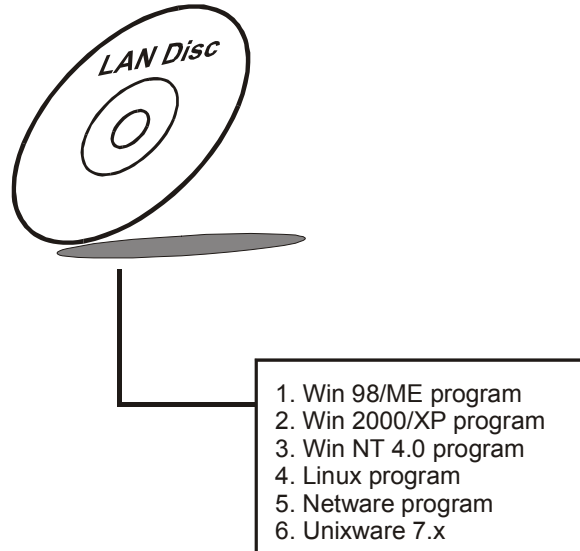


For more details on Installation procedure, please refer to Readme.txt file found on LAN DRIVER UTILITY.

3-5. SOUND DRIVER UTILITY

3-5-1. Introduction

The Realtek ALC202A sound function enhanced in this system is fully compatible with Windows 98, Windows 98SE, Windows NT 4.0, Windows 2000, Windows ME and Windows XP. Below, you will find the content of the Sound driver :

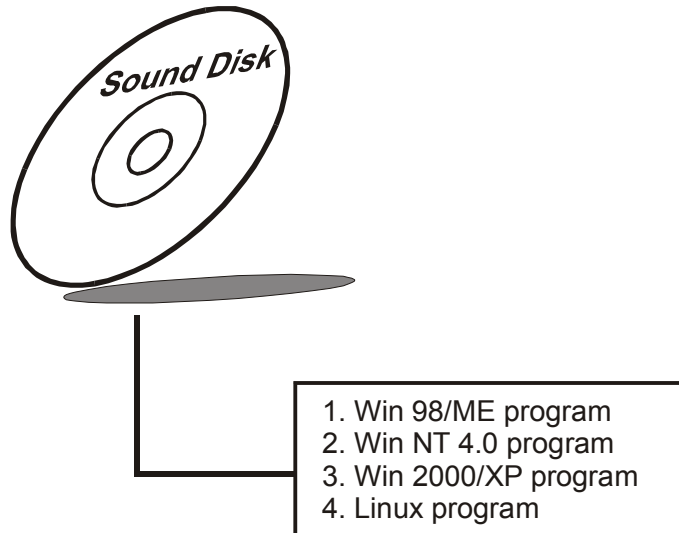

3-5-2. Installation Procedure for Windows 9x/NT/2000/XP

1. From the task bar, click on Start, and then Run.
2. In the Run dialog box, type D:\Sound\path\setup, where "D:\Sound\pathname" refers to the full path to the source files.
3. Click on the OK button or press the ENTER key.
4. Click on the "Next" and OK prompts as they appear.
5. Reboot the system to complete the driver installation.

3-6. INTEL® CHIPSET SOFTWARE INSTALLATION UTILITY

3-6-1. Introduction

The Intel® Chipset Software Installation Utility installs to the target system the Windows* INF files that outline to the operating system how the chipset components will be configured. This is needed for the proper functioning of the following features:

- Core PCI and ISAPNP Services
- AGP Support
- IDE/ATA33/ATA66/ATA100 Storage Support
- USB Support
- Identification of Intel® Chipset Components in Device Manager

3-6-2. Installation of Utility for Windows 98SE/ME/2000/XP

The Utility Pack is to be installed only for Windows 98SE, Windows ME, Windows 2000 and XP program.

It should be installed right after the OS installation, kindly follow the following steps:

1. Place insert the Utility Disk into Floppy Disk Drive A/B or CD ROM drive.
2. Under Windows 98SE/ME/2000/XP system, go to the directory where Utility Disc is located.
3. Click **Setup.exe** file for utility installation.
4. Follow the instructions on the screen to complete the installation.
5. Once installation is completed, shut down the system and restart in order for the changes to take effect.

3-7. USB2.0 SOFTWARE INSTALLATION UTILITY

3-7-1. Installation of Utility for Windows 98SE/ 2000/XP

Intel USB 2.0 Enhanced Host Controller driver can only be used on Windows 98SE, Windows 2000 and Windows XP on Intel Desktop boards. It should be installed right after the OS installation, kindly follow the following steps:

1. Place insert the Utility Disk into Floppy Disk Drive A/B or CD ROM drive.
2. Under Windows 98SE, 2000, and XP system, go to the directory where Utility Disc is located.
3. Start the “System” wizard in control panel. (Click Start/Settings/Control Panel).
4. Select “Hardware” and click “Device Manager ” button.
5. Double Click “USB Root Hub”.
6. Select “Driver”.
7. Click “Install” to install the driver.
8. Follow the instructions on the screen to complete the installation.
9. Click “Finish” after the driver installation is complete.

AWARD BIOS SETUP

CHAPTER

4

This chapter shows how to set up the Award BIOS.

Section includes:

- Introduction
- Entering Setup
- The Standard CMOS Features
- The Advanced BIOS Features
- The Advanced Chipset Features
- Integrated Peripherals
- Power Management Setup
- PNP/PCI Configuration
- PC Health Status
- Frequency Control
- Load Fail-Safe Defaults
- Load Optimized Defaults
- Password Setting
- Save and Exit Setup
- Exit Without Saving


4-1. INTRODUCTION

This chapter will show you the function of the BIOS in managing the features of your system. The Prox-B501 Pentium M Flex-ATX Motherboard is equipped with the BIOS for system chipset from Award Software Inc. This page briefly explains the function of the BIOS in managing the special features of your system. The following pages describe how to use the BIOS for system chipset Setup menu.

Your application programs (such as word processing, spreadsheets, and games) rely on an operating system such as DOS or OS/2 to manage such things as keyboard, monitor, disk drives, and memory.

The operating system relies on the BIOS (Basic Input and Output system), a program stored on a ROM (Read-only Memory) chip, to initialize and configure your computer's hardware. As the interface between the hardware and the operating system, the BIOS enables you to make basic changes to your system's hardware without having to write a new operating system.

The following diagram illustrates the interlocking relationships between the system hardware, BIOS, operating system, and application program:

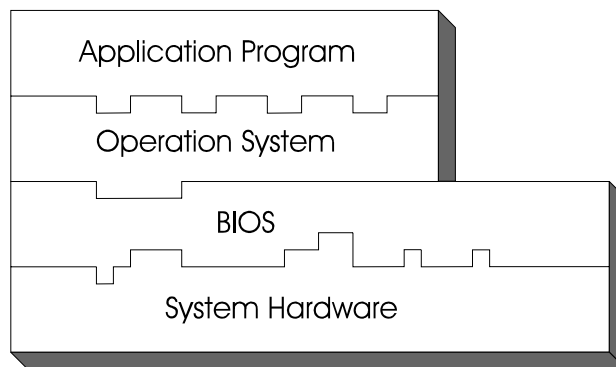

4-2. ENTERING SETUP

When the system is powered on, the BIOS will enter the Power-On Self Test (POST) routines and the following message will appear on the lower screen:

PRESS TO ENTER SETUP, ESC TO SKIP MEMORY TEST

As long as this message is present on the screen you may press the key (the one that shares the decimal point at the bottom of the number keypad) to access the Setup program. In a moment, the main menu of the Award SETUP program will appear on the screen:

Phoenix - AwardBIOS CMOS Setup Utility	
<ul style="list-style-type: none"> ▶ Standard CMOS Features ▶ Advanced BIOS Features ▶ Advanced Chipset Features ▶ Integrated Peripherals ▶ Power Management Setup ▶ PnP/PCI Configurations ▶ PC Health Status 	<ul style="list-style-type: none"> ▶ Frequency Control Load Fail-Safe Defaults Load Optimized Defaults Set Supervisor Password Set User Password Save & Exit Setup Exit Without Saving
Esc : Quit F10 : Save & Exit Setup	↑↓→← : Select Item
Time, Date, Hard Disk Type	

Setup program initial screen

You may use the cursor the up/down keys to highlight the individual menu items. As you highlight each item, a brief description of the highlighted selection will appear at the bottom of the screen.

4-3. THE STANDARD CMOS FEATURES

Highlight the "STANDARD CMOS FEATURES" and press the <ENTER> key and the screen will display the following table:

Phoenix - AwardBIOS CMOS Setup Utility		
Standard CMOS Features		
Date (mm:dd:yy)	Wed, May 26 2004	Item Help
Time (hh:mm:ss)	15 : 5 : 24	
► IDE Primary Master	[None]	Menu Level ► Change the internal clock.
► IDE Primary Slave	[None]	
► IDE Secondary Master	[None]	
► IDE Secondary Slave	[None]	
Drive A	[1.44M, 3.5 in.]	
Drive B	[None]	
Video	[EGA/VGA]	
Halt On	[All, But Keyboard]	
Base Memory	640K	
Extended Memory	490496K	
Total Memory	491520K	
↑↓→←: Move Enter: Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6: Fail-Safe Defaults F7:Optimized Defaults		

CMOS Setup screen

In the above Setup Menu, use the arrow keys to highlight the item and then use the <PgUp> or <PgDn> keys to select the value you want in each item.

Date:

< Month >, < Date > and <Year >. Ranges for each value are in the CMOS Setup Screen, and the week-day will skip automatically.

Time:

< Hour >, < Minute >, and < Second >. Use 24 hour clock format, i.e., for PM numbers, add 12 to the hour. For example: 4: 30 P.M. You should enter the time as 16:30:00.

IDE Primary Master / Slave:**IDE Secondary Master / Slave:**

The BIOS can automatically detect the specifications and optimal operating mode of almost all IDE hard drives. When you select type AUTO for a hard drive, the BIOS detect its specifications during POST, every time system boots.

If you do not want to select drive type AUTO, other methods of selecting drive type are available:

1. Match the specifications of your installed IDE hard drive(s) with the preprogrammed values for hard drive types 1 through 45.
2. Select USER and enter values into each drive parameter field.
3. Use the IDE HDD AUTO DETECTION function in Setup.

Here is a brief explanation of drive specifications:

Type: The BIOS contains a table of pre-defined drive types. Each defined drive type has a specified number of cylinders, number of heads, write precompensation factor, landing zone, and number of sectors. Drives whose specifications do not accommodate any predefined type are classified as type USER.

- Size: Disk drive capacity (approximate). Note that this size is usually greater than the size of a formatted disk given by a disk-checking program.
- Cyls: number of cylinders.
- Head: number of heads.
- Precomp: write precompensation cylinders.
- Landz: landing zone.
- Sector: number of sectors.
- Mode: Auto, Normal, Large or LBA.

Auto: The BIOS automatically determines the optimal mode.

- Normal: Maximum number of cylinders, heads, sectors supported are 1024, 16 and 63.
- Large: For drives that do not support LBA and have more than 1024 cylinders.

- LBA (Logical Block Addressing): During drive accesses, the IDE controller transforms the data address described by sector, head and cylinder number into a physical block address, significantly improving data transfer rates. For drives greater than 1024 cylinders.

DRIVE A AND DRIVE B:

Select the type of floppy disk drive installed in your system. The available options are 360KB 5.25in, 1.2KB 5.25in, 720KB 3.5in, 1.44MB 3.5in, 2.88MB 3.5in and None.

VIDEO:

This category selects the type of video adapter used for the primary system monitor. Although secondary monitors are supported, you do not have to select the type in Setup. Available Options are as follows:

EGA/VGA	Enhanced Graphics Adapter/Video Graphics Array. For EGA, VGA, SEGA, SVGA or PGA monitor adapters.
CGA 40	Color Graphics Adapter, power up in 40 column mode.
CGA 80	Color Graphics Adapter, power up in 80 column mode.
MONO	Monochrome adapter, includes high resolution monochrome adapters.

HALT ON:

This category allows user to choose whether the computer will stop if an error is detected during power up. Available options are “All errors”, “No errors”, “All, But keyboard”, “All, But Diskette”, and “All But Disk/Key”.

BASE MEMORY:

Displays the amount of conventional memory detected during boot up.

EXTENDED MEMORY:

Displays the amount of extended memory detected during boot up.

TOTAL MEMORY:

Displays the total memory available in the system.

HARD DISK ATTRIBUTES:

Type	Cylinders	Heads	V-P comp	LZone	Sect	Capacity
1	306	4	128	305	17	10
2	615	4	300	615	17	20
3	615	6	300	615	17	30
4	940	8	512	940	17	62
5	940	6	512	940	17	46
6	615	4	65535	615	17	20
7	642	8	256	511	17	30
8	733	5	65535	733	17	30
9	900	15	65535	901	17	112
10	820	3	65535	820	17	20
11	855	5	65535	855	17	35
12	855	7	65535	855	17	49
13	306	8	128	319	17	20
14	733	7	65535	733	17	42
15	000	0	0000	000	00	00
16	612	4	0000	663	17	20
17	977	5	300	977	17	40
18	977	7	65535	977	17	56
19	1024	7	512	1023	17	59
20	733	5	300	732	17	30
21	733	7	300	732	17	42
22	733	5	300	733	17	30
23	306	4	0000	336	17	10
24	977	5	65535	976	17	40
25	1024	9	65535	1023	17	76
26	1224	7	65535	1223	17	71
27	1224	11	65535	1223	17	111
28	1224	15	65535	1223	17	152
29	1024	8	65535	1023	17	68
30	1024	11	65535	1023	17	93
31	918	11	65535	1023	17	83
32	925	9	65535	926	17	69
33	1024	10	65535	1023	17	85
34	1024	12	65535	1023	17	102
35	1024	13	65535	1023	17	110
36	1024	14	65535	1023	17	119
37	1024	2	65535	1023	17	17
38	1024	16	65535	1023	17	136
39	918	15	65535	1023	17	114
40	820	6	65535	820	17	40
41	1024	5	65535	1023	17	42
42	1024	5	65535	1023	26	65
43	809	6	65535	852	17	40
44	809	6	65535	852	26	61
45	776	8	65335	775	33	100
47			AUTO			

Award Hard Disk Type Table

4-4. THE ADVANCED BIOS FEATURES

Choose the "ADVANCED BIOS FEATURES" in the main menu, the screen shown as below.

Phoenix - AwardBIOS CMOS Setup Utility Advanced BIOS Features		
Virus Warning	[Disabled]	<div>Item Help</div> <div>Menu Level ▶</div> <div>Allows you to choose the VIRUS warning feature for IDE Hard Disk boot sector protection. If this function is enabled and someone attempt to write data into this area, BIOS will show a warning message on screen and alarm beep</div>
CPU L1 & L2 Cache	[Enabled]	
Quick Power On Self Test	[Enabled]	
First Boot Device	[Floppy]	
Second Boot Device	[HDD-0]	
Boot Up Floppy Seek	[Enabled]	
Boot Up NumLock Status	[On]	
Typematic Rate Setting	[Disabled]	
x Typematic Rate (Chars/Sec)	6	
x Typematic Delay (Msec)	250	
Security Option	[Setup]	
OS Select For DRAM > 64MB	[Non-OS2]	
↑↓→←: Move Enter: Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6: Fail-Safe Defaults F7:Optimized Defaults		

BIOS Features Setup Screen

The "BIOS FEATURES SETUP" allow you to configure your system for basic operation. The user can select the system's default speed, boot-up sequence, keyboard operation, shadowing and security.

A brief introduction of each setting is given below.

VIRUS WARNING :

This item allows you to choose the Virus Warning feature for IDE Hard Disk boot sector protection. If this function is enabled and someone attempt to write data into this area, BIOS will show a warning message on screen and alarm beep.

CPU L1 & L2 CACHE :

This item allows you to enable L1 & L2 cache.

QUICK POWER ON SELF-TEST:

This item allows you to speed up Power On Self Test (POST) after power-up the computer. When enabled, the BIOS will shorten or skip some check items during POST.

FIRST/SECOND/ BOOT DEVICE:

The BIOS attempt to load the operating system from the devices in the sequence selected in these items.

BOOT UP FLOPPY SEEK:

You may enable / disable this item to define whether the system will look for a floppy disk drive to boot at power-on, or proceed directly to the hard disk drive.

BOOT UP NUMLOCK STATUS:

Select power on state for NumLock.

TYPEMATIC RATE SETTING:

Enable this item if you wish to be able to configure the characteristics of your keyboard. Typematic refers to the way in which characters are entered repeatedly if a key is held down. For example, if you press and hold down the "A" key, the letter "a" will repeatedly appear on your screen on your screen until you release the key. When enabled, the typematic rate and typematic delay can be selected.

TYPEMATIC RATE (CHARS/SEC):

This item sets the number of times a second to repeat a key stroke when you hold the key down.


TYPEMATIC DELAY (MSEC):

The item sets the delay time after the key is held down before it begins to repeat the keystroke.

SECURITY OPTION:

This category allows you to limit access to the system and Setup, or just to Setup.

System	The system will not boot and access to Setup will be denied if the correct password is not entered at the prompt.
Setup	The system will boot, but access to Setup will be denied if the correct password is not entered at the prompt.

 To disable security, select PASSWORD SETTING at Main Menu and then you will be asked to enter password. Do not type anything and just press <Enter>, it will disable security. Once the security is disabled, the system will boot and you can enter Setup freely.

OS SELECT FOR DRAM >64MB :

Select the operating system that is running with greater than 64MB or RAM on the system. You may choose OS2 or Non-OS2.

4-5. ADVANCED CHIPSET FEATURES

Choose the "ADVANCED CHIPSET FEATURES" from the main menu, the screen shown as below.

Phoenix - AwardBIOS CMOS Setup Utility Advanced Chipset Features		
DRAM Data Integrity Mode	Non-ECC	Item Help
System BIOS Cacheable	[Enabled]	
Video BIOS Cacheable	[Disabled]	Menu Level ▶
Memory Hole At 15M-16M	[Disabled]	
Delayed Transaction	[Enabled]	
AGP Aperture Size (MB)	[64]	
** On-Chip VGA Setting **		
On-Chip VGA	[Enabled]	
On-Chip Frame Buffer Size	[32MB]	
Boot Display	[CRT+LFP]	
Panel Type	[640 x480 18bits]	
↑↓→←: Move Enter: Select +/-/PU/PD: Value F10: Save ESC: Exit F1: General Help F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults		

Chipset Features Setup Screen

This parameter allows you to configure the system based on the specific features of the installed chipset. The chipset manages bus speed and access to system memory resources, such as DRAM and the external cache.

It also coordinates communications between conventional ISA bus and the PCI bus. It must be stated that these items should never need to be altered. The default settings have been chosen because they provide the best operating conditions for the system. The only time you might consider making any changes would be if you discovered that data was being lost while using your system.

DRAM DATA INTEGRITY MODE:

Select Parity or ECC (error-correcting code), according to the type of installed DRAM.

SYSTEM BIOS CACHEABLE:

Selecting Enabled allows caching of the system BIOS ROM at F0000h-FFFFFh, resulting in better system performance. However, if any program writes to this memory area, a system error may result.

VIDEO BIOS CACHEABLE:

Select Enabled allows caching of the video BIOS, resulting in better system performance. However, if any program writes to this memory area, a system error may result.

MEMORY HOLE AT 15M-16M:

You can reserve this area of system memory for ISA adapter ROM. When this area is reserved, it cannot be cached. The user information of peripherals that need to use this area of system memory usually discusses their memory requirements.

DELAYED TRANSACTION:

The chipset has an embedded 32-bit posted write buffer to support delay transactions cycles. Select Enabled to support compliance with PCI specification version 2.1.

AGP APERTURE SIZE:

This field determines the effective size of the Graphic Aperture used for a particular GMCH configuration. It can be updated by the GMCH-specific BIOS configuration sequence before the PCI standard bus enumeration sequence takes place. If it is not updated then a default value will select an aperture of maximum size.

PANEL TYPE:

The options for these items are found in its sub menu. By pressing the <ENTER> key, you are prompt to enter the sub menu of the detailed options as shown below:

Panel Type			
640 x 480	18-bits	[<input checked="" type="checkbox"/>]
800 x 600	18-bits	[<input type="checkbox"/>]
1024 x 768	18-bits	[<input type="checkbox"/>]
1280 x 1024	36-bits	[<input type="checkbox"/>]
1400 x 1050	36-bits	[<input type="checkbox"/>]
1600 x 1200	36-bits	[<input type="checkbox"/>]
1024 x 768	24-bits	[<input type="checkbox"/>]
↑↓:Move Enter: Accept ESC:Abort			

4-6. INTEGRATED PERIPHERALS

Choose "INTEGRATED PERIPHERALS" from the main setup menu, a display will be shown on screen as below:

Phoenix - AwardBIOS CMOS Setup Utility
Integrated Peripherals

► OnChip IDE Device	[Press Enter]	Item Help
► Onboard Device	[Press Enter]	
► SuperIO Device	[Press Enter]	
Watch Dog Timer Select	[Disabled]	Menu Level ►
Onboard Serial Port 3	[3E8]	
Serial Port 3 Use IRQ	[IRQ10]	
Onboard Serial Port 4	[2E8]	
Serial Port 4 Use IRQ	[IRQ11]	
↑↓→←: Move Enter: Select +/-/PU/PD: Value F10: Save ESC: Exit F1: General Help F5: Previous Values F6: Fail-Safe Defaults F7: Optimized Defaults		

Integrated Peripherals Setup Screen

By moving the cursor to the desired selection and by pressing the <F1> key, the all options for the desired selection will be displayed for choice.

- 🔔 If bios setup menu item supports USB device boot, it will cause Win9x detects the same storages twice when the system is rebooted, and USB HDD will fail.
Note: this cause just happen under Win9x, the phenomenon is a limitation.

VIA ONCHIP IDE DEVICE:

The options for these items are found in its sub menu. By pressing the <ENTER> key, you are prompt to enter the sub menu of the detailed options as shown below:

Phoenix – Award CMOS Setup Utility
OnChip IDE Device

OnChip Primary PCI IDE	[Enabled]	Item Help
IDE Primary Master PIO	[Auto]	
IDE Primary Slave PIO	[Auto]	Menu Level ▶
IDE Primary Master UDMA	[Auto]	
IDE Primary Slave UDMA	[Auto]	
OnChip Secondary PCI IDE	[Enabled]	
IDE Secondary Master PIO	[Auto]	
IDE Secondary Slave PIO	[Auto]	
IDE Secondary Master UDMA	[Auto]	
IDE Secondary Slave UDMA	[Auto]	
IDE HDD Block Mode	[Enabled]	
↑↓→←:Move Enter: Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6:Fail-Safe Defaults F7:Optimized Defaults		

Descriptions on each item above are as follows:

1. OnChip Primary PCI IDE

The integrated peripheral controller contains an IDE interface with support for two IDE channels. Select Enabled to activate each channel separately.

**2. Primary Master/Slave PIO
Secondary Master/Slave PIO**

The four IDE PIO fields allow you to set a PIO mode (0-4) for each of the four IDE devices that the onboard IDE interface supports. Modes 0 through 4 provide successively increased performance. In Auto mode, the system automatically determines the best mode for each device.

**3. Primary Master/Slave UDMA
Secondary Master/Slave UDMA**

Ultra DMA/33 implementation is possible only if your IDE hard drive supports it and the operating environment includes a DMA driver (Windows 95 OSR2 or a third-party IDE bus master driver). If you

hard drive and your system software both support Ultra DMA/33, select Auto to enable BIOS support.

4. IDE HDD Block Mode

Block mode is also called block transfer, multiple commands, or multiple sector read/write. If your IDE hard drive supports block mode (most new drives do), select Enabled for automatic detection of the optimal number of block read/writes per sector the drive can support.

ONBOARD DEVICE:

The options for these items are found in its sub menu. By pressing the <ENTER> key, you are prompt to enter the sub menu of the detailed options as shown below:

Phoenix – Award CMOS Setup Utility
Onboard Device

USB Controller	[Enabled]	Item Help
USB 2.0 Support	[Enabled]	
USB Keyboard Support	[Disabled]	
USB Mouse Support	[Disabled]	
AC97 Audio	[Auto]	Menu Level ►
Onboard LAN	[Enabled]	
Init Display First	[Onboard]	
↑↓→←:Move Enter: Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6:Fail-Safe Defaults F7:Optimized Defaults		

Descriptions on each item above are as follows:

1. USB Controller

This should be enabled if your system has a USB installed on the system board and you want to use it. Even when so equipped, if you add a higher performance controller, you will need to disable this feature.

2. USB Keyboard Support

Select Enabled if your system contains a Universal Serial Bus (USB) controller and you have a USB keyboard.

3. USB Mouse Support

Select Enabled if your system contains a Universal Serial Bus (USB) controller and you have a USB Mouse.

4. AC97 Audio:

This item allows you to enable/disable to support AC97 Audio.

5. Init Display First

This item allows you to decide to active whether PCI Slot or on-chip VGA first.

SUPER IO DEVICE:

The options for these items are found in its sub menu. By pressing the <ENTER> key, you are prompt to enter the sub menu of the detailed options as shown below:

Phoenix – Award CMOS Setup Utility
SuperIO Device

Onboard FDC Controller	[Enabled]	Item Help
Onboard Serial Port 1	[3F8/IRQ4]	
Onboard Serial Port 2	[2F8/IRQ3]	
UART Mode Select	[Normal]	Menu Level ►
X Rx/D, Tx/D Active	Hi, Lo	
X IR Transmission Delay	Enabled	
X UR2 Duplex Mode	Half	
X Use IR Pins	IR-Rx2Tx2	
Onboard Parallel Port	[378/IRQ7]	
Parallel Port Mode	[SPP]	
X EPP Mode Select	EPP1.7	
X ECP Mode Use DMA	3	
PWRON After PWR-Fail	[Off]	
↑↓→←:Move Enter: Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6:Fail-Safe Defaults F7:Optimized Defaults		

Descriptions on each item above are as follows:

1. Onboard FDC Controller

Select Enabled if the system has a floppy disk controller (FDC) installed on the system board and you wish to use it. If you install and-in FDC or the system has no floppy drive, select Disabled.

2. Onboard Serial Port 1/2

Select an address and corresponding interrupt for the first and second serial ports.

3. UART Mode Select

This item allows you to select UART mode.

4. Rx/D, Tx/D Active

This item allows you to determine the active of RxD, TxD.

5. IR Transmission Delay

This item allows you to enable/disable IR transmission delay.

6. UR2 Duplex Mode

This item allows you to select the IR half/full duplex function.

7. Use IR Pins

This item allows you to select IR transmission routes, one is RxD2m, TxD2 (COM Port) and the other is IR-Rx2Tx2

8. Onboard Parallel Port

This item allows you to determine access onboard parallel port controller with which I/O address.

9. Parallel Port Mode

Select an operating mode for the onboard parallel (printer) port. Select *Normal*, *Compatible*, or *SPP* unless you are certain your hardware and software both support one of the other available modes.

10. EPP Mode Select

Select EPP port type 1.7 or 1.9.

11. ECP Mode Use DMA

Select a DMA channel for the parallel port for use during ECP mode.

12. PWRON After PWR-Fail

This item allows you to select if you want to power on the system after power failure. The choice: Off, On, Former-Sts.

ONBOARD SERIAL PORT 3:

ONBOARD SERIAL PORT 4:

Select a logical COM port name and matching address for the third and forth serial ports. Select an address and corresponding interrupt for third and forth serial port.

SERIAL PORT 3 USE IRQ:

SERIAL PORT 4 USE IRQ:

The items set the IRQ address of the serial ports.

4-7. POWER MANAGEMENT SETUP

Choose "POWER MANAGEMENT SETUP" option on the main menu, a display will be shown on screen as below :

Phoenix - AwardBIOS CMOS Setup Utility		
Power Management Setup		
ACPI Function	[Enabled]	Item Help
Power Management	[User Define]	
Video Off Method	[DPMS]	
Video Off In Suspend	[Yes]	
MODEM Use IRQ	[3]	
Suspend Mode	[Disabled]	Menu Level ▶
Power-Supply Type	[AT]	
Soft-Off by PWR-BTTN	Instant-Off	
Wake-Up by PCI card	[Enabled]	
Resume by Alarm	[Disabled]	
x Date (of Month) Alarm	0	
x Time (hh:mm:ss) Alarm	0 : 0 : 0	
** Reload Global Timer Events **		
Primary IDE 0	[Disabled]	
Primary IDE 1	[Disabled]	
Secondary IDE 0	[Disabled]	
Secondary IDE 1	[Disabled]	
FDD, COM, LPT Port	[Disabled]	
↑↓→←: Move Enter: Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help		
F5: Previous Values F6: Fail-Safe Defaults F7:Optimized Defaults		

Power Management Setup Screen

The "Power Management Setup" allows the user to configure the system to the most effectively save energy while operating in a manner consistent with your own style of computer use.

ACPI SUSPEND TYPE:

This item allows the user to set the ACPI suspend type to be used.

POWER MANAGEMENT:

This item allows you to select the Power Management mode.

VIDEO OFF OPTION:

When enabled, this feature allows the VGA adapter to operate in a power saving mode.

Always On	Monitor will remain on during power saving modes.
Suspend --> Off	Monitor blanked when the systems enters the Suspend mode.
Susp,Stby --> Off	Monitor blanked when the system enters either Suspend or Standby modes.
All Modes --> Off	Monitor blanked when the system enters any power saving mode.

VIDEO OFF METHOD:

This determines the manner in which the monitor is blanked.

V/H SYNC+Blank	This selection will cause the system to turn off the vertical and horizontal synchronization ports and write blanks to the video buffer.
Blank Screen	This option only writes blanks to the video buffer.
DPMS	Select this option if your monitor supports the Display Power Management Signalling (DPMS) standard of the Video Electronics Standards to select video power management values.

MODEM USE IRQ:

This item enable you to name the interrupt request (IRQ) line assigned to the modem (if any) on your system. Activity of the selected IRQ always awakens the system.

SUSPEND MODE:

When enabled and after the set time of system inactivity, all devices except the CPU will be shut off.

SOFT-OFF BY PWR-BTTN:

Pressing the power button for more than 4 seconds forces the system to enter the Soft-Off state when the system has “hung”. The choices are Delay 4 Sec and Instant-Off.

WAKE-UP BY PCI CARD:

An input signal from PME on the PCI card awakens the system from a soft off state.

RESUME BY ALARM:

When *Enabled*, you can set the date and time at which the RTC (real-time clock) alarm awakens the system from Suspend mode.

PM EVENTS:

PM events are I/O events whose occurrence can prevent the system from entering a power saving mode or can awaken the system from such a mode. In effect, the system remains alert for anything, which occurs to a device which is configured as *Enabled*, even when the system is in a power down mode. (1) **Primary IDE 0** (2) **Primary IDE 1** (3) **Secondary IDE 0** (4) **Secondary IDE 1** (5) **FDD, COM, LPT Port**

4-8. PNP/PCI CONFIGURATION

Choose "PNP/PCI CONFIGURATION" from the main menu, a display will be shown on screen as below:

Phoenix - AwardBIOS CMOS Setup Utility PnP/PCI Configurations		
Reset Configuration Data	[Disabled]	Item Help
Resources Controlled By x IRQ Resources	[Auto (ESCD)] Press Enter	Menu Level ►
PCI/VGA Palette Snoop	[Disabled]	Select Yes if you are using a Plug and Play capable operating system Select No if you need the BIOS to configure non-boot devices
↑↓→←: Move Enter: Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6: Fail-Safe Defaults F7:Optimized Defaults		

PNP/PCI Configuration Setup Screen

The PNP/PCI Configuration Setup describes how to configure PCI bus system. PCI, also known as Personal Computer Interconnect, is a system, which allows I/O devices to operate at speeds nearing the speed of the CPU itself uses when communicating with its own special components.

This section covers technical items, which is strongly recommended for experienced users only.

RESET CONFIGURATION DATA:

Normally, you leave this field Disabled. Select Enabled to reset Extended System Configuration Data (ESCD) when you exit Setup if you have installed a new add-on and the system configuration has caused such a serious conflict that the operating system cannot boot.

RESOURCE CONTROLLED BY:

The Award Plug and Play Bios can automatically configure all of the booth and Plug and Play-compatible devices. However, this capability means absolutely nothing unless you are using a Plug and Play operating system such as Windows 95. By choosing “manual”, you are allowed to configure the *IRQ Resources and DMA Resources*.

IRQ RESOURCES:

The options for these items are found in its sub menu. By pressing the <ENTER> key, you are prompt to enter the sub menu of the detailed options as shown below:

Phoenix – Award CMOS Setup Utility
IRQ Resources

IRQ-3 assigned to	[PCI Device]	Item Help
IRQ-4 assigned to	[PCI Device]	
IRQ-5 assigned to	[PCI Device]	
IRQ-7 assigned to	[PCI Device]	
IRQ-9 assigned to	[PCI Device]	
IRQ-10 assigned to	[PCI Device]	
IRQ-11 assigned to	[PCI Device]	
IRQ-12 assigned to	[PCI Device]	
IRQ-14 assigned to	[PCI Device]	
IRQ-15 assigned to	[PCI Device]	
		Menu Level ▶
		Legacy ISA for devices compliant with the original PC AT bus specification, PCI/ISA PnP for devices compliant with the Plug and Play standard whether designed for PCI or ISA bus architecture
↑↓→←:Move Enter: Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6:Fail-Safe Defaults F7:Optimized Defaults		

Descriptions on each item above are as follows:

13. IRQ-n Assigned to:

You may assign each system interrupt a type, depending on the type of device using the interrupt.

4-9. PC HEALTH STATUS

Choose "PC HEALTH STATUS" from the main menu, a display will be shown on screen as below:

Phoenix - AwardBIOS CMOS Setup Utility		
PC Health Status		
Current Warning Temperature	[Disabled]	Item Help
Current CPU Temperature	45°C/113°F	Menu Level ▶
Current SYSTEM Fan Speed	0 RPM	
Current CPU Fan Speed	5113 RPM	
Vcore	1.34V	
Vccp	1.02V	
3.3 V	3.36V	
+ 5 V	5.05V	
+12V	12.03V	
-12 V	-12.52V	
- 5 V	- 5.04V	
VBAT (V)	3.20V	
5VSB (V)	4.96V	
Shutdown Temperature	[Disabled]	
↑↓←→: Move Enter: Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help		
F5: Previous Values F6: Fail-Safe Defaults F7:Optimized Defaults		

PC Health Status Setup Screen

The PC Health Status Setup allows you to select whether to choose between monitoring or to ignore the hardware monitoring function of your system.

CURRENT WARNING TEMPERATURE:

Select the combination of lower and upper limits for the CPU temperature. If the CPU temperature extends beyond either limit, any warning mechanism programmed into your system will be activated.

CURRENT CPU TEMPERATURE:

This item shows you the current CPU temperature.

CURRENT SYSTEM FAN SPEED:

This item shows you the current System FAN speed.

CURRENT CPU FAN SPEED:

This item shows you the current CPUFAN speed.

VCORE:

This item shows you the current system voltage.

3.3V / +5V / +12V / -12V / -5V / 5VSB:

Show you the voltage of 3.3V/+5V/+12V/-12V/-5V/5VSB.

SHUTDOWN TEMPERATURE:

This item allows you to set up the CPU shutdown Temperature. This function is only effective under Windows 98 ACPI mode.

4-10. FREQUENCY CONTROL

Choose "FREQUENCY CONTROL" from the main menu, a display will be shown on screen as below:

Phoenix - AwardBIOS CMOS Setup Utility
Frequency Control

Auto Detect PCI Clk	[Enabled]	Item Help
Spread Spectrum	[Enabled]	Menu Level ►
↑↓→←: Move Enter: Select +/-/PU/PD:Value F10:Save ESC:Exit F1:General Help F5: Previous Values F6: Fail-Safe Defaults F7:Optimized Defaults		

Frequency Control Setup Screen

This setup menu allows you to specify your settings for frequency control.

AUTO DETECT PCI CLK:

This item allows you to enable or disable auto detect PCI Clock.

SPREAD SPECTRUM:

When the system clock generator pulses, the extreme values of the pulse generate excess EMI. Enabling pulse spectrum spread modulation changes the extreme values from spikes to flat curves, thus reducing EMI. This benefit may in some cases be outweighed by problems with timing-critical devices such as a clock-sensitive SCSI device.

4-11. LOAD FAIL-SAFE DEFAULTS

By pressing the <ENTER> key on this item, you get a confirmation dialog box with a message similar to the following:

Load Fail-Safe Defaults (Y/N) ? N

To use the BIOS default values, change the prompt to "Y" and press the <Enter > key. CMOS is loaded automatically when you power up the system.

4-12. LOAD OPTIMIZED DEFAULTS

When you press <Enter> on this category, you get a confirmation dialog box with a message similar to the following:

Load Optimized Defaults (Y/N) ? N

Pressing "Y" loads the default values that are factory setting for optimal performance system operations.

4-13. PASSWORD SETTING


User is allowed to set either supervisor or user password, or both of them. The difference is that the supervisor password can enter and change the options of the setup menus while the user password can enter only but do not have the authority to change the options of the setup menus.

TO SET A PASSWORD

When you select this function, the following message will appear at the center of the screen to assist you in creating a password.

Enter Password:

Type the password up to eight characters in length, and press < Enter >. The password typed now will clear any previously entered password from CMOS memory. You will be asked to confirm the password. Type the password again and press the < Enter > key. You may also press < Esc > to abort the selection and not enter a password.

 User should bear in mind that when a password is set, you will be asked to enter the password everything you enter CMOS setup Menu.

TO DISABLE THE PASSWORD

To disable the password, select this function (do not enter any key when you are prompt to enter a password), and press the <Enter> key and a message will appear at the center of the screen:

PASSWORD DISABLED!!!
Press any key to continue...

Press the < Enter > key again and the password will be disabled. Once the password is disabled, you can enter Setup freely.

4-14. SAVE & EXIT SETUP

After you have completed adjusting all the settings as required, you must remember to save these setting into the CMOS RAM. To save the settings, select “SAVE & EXIT SETUP” and press <Enter>, a display will be shown as follows:

Phoenix - AwardBIOS CMOS Setup Utility	
<ul style="list-style-type: none"> ▶ Standard CMOS Features ▶ Advanced BIOS Features ▶ Advanced Chipset Features ▶ Integrated Peripherals ▶ Power Management ▶ PnP/PCI Configura ▶ PC Health Status 	<ul style="list-style-type: none"> ▶ Frequency Control Load Fail-Safe Defaults Load Optimized Defaults Set Supervisor Password
<div style="border: 1px solid black; padding: 5px; text-align: center;">Save to CMOS and EXIT Y/N)? Y</div>	
<div style="display: flex; justify-content: space-between;"> word etup Saving </div>	
<div style="display: flex; justify-content: space-between;"> Esc : Quit ↑↓→← : Select Item </div>	
<div style="display: flex; justify-content: space-between;"> F10 : Save & Exit Setup </div>	
Save Data to CMOS	

When you confirm that you wish to save the settings, your system will be automatically restarted and the changes you have made will be implemented. You may always call up the setup program at any time to adjust any of the individual items by pressing the key during boot up.

4-15. EXIT WITHOUT SAVING


If you wish to cancel any changes you have made, you may select the “EXIT WITHOUT SAVING” and the original setting stored in the CMOS will be retained. The screen will be shown as below:

Phoenix - AwardBIOS CMOS Setup Utility

▶ Standard CMOS Features ▶ Advanced BIOS Features ▶ Advanced Chipset Features ▶ Integrated Peripherals ▶ Power Management ▶ PnP/PCI Configura ▶ PC Health Status	▶ Frequency Control Load Fail-Safe Defaults Load Optimized Defaults Set Supervisor Password word etup Saving
Quit Without Saving (Y/N)? N	
Esc : Quit F10 : Save & Exit Setup	
Abandon all Datas	

↑↓→← : Select Item

EXPANSION BUS



This appendix indicates the pin assignments.


Section includes:

- PCI BUS Pin Assignment
- AGP BUS Pin Assignment

PCI BUS PIN ASSIGNMENT

Like ISA-BUS connector, the PCI-BUS edge connector is also divided into two sets: one consists of 98-pin; the other consists of 22-pin.

The pin assignments are as follows :



B		A		B		A	
PIN	ASSIGNMENT	PIN	ASSIGNMENT	PIN	ASSIGNMENT	PIN	ASSIGNMENT
B1	-12V	A1	TRST#	B31	+3.3V	A31	AD18
B2	TCK	A2	+12V	B32	AD17	A32	AD16
B3	GND	A3	TMS	B33	C/BE2#	A33	+3.3V
B4	TDO	A4	TDI	B34	GND	A34	FRAME#
B5	+5V	A5	+5V	B35	IRDY#	A35	GND
B6	+5V	A6	INTA#	B36	+3.3V	A36	TRDY#
B7	INTB#	A7	INTC#	B37	DEVSEL#	A37	GND
B8	INTD#	A8	+5V	B38	GND	A38	STOP#
B9	REQ3#	A9	CLKC	B39	LOCK#	A39	+3.3V
B10	REQ1#	A10	+5V(I/O)	B40	PERR#	A40	SDONE
B11	GNT3#	A11	CLKD	B41	+3.3V	A41	SB0#
B12	GND	A12	GND	B42	SERR#	A42	GND
B13	GND	A13	GND	B43	+3.3V	A43	PAR
B14	CLKA	A14	GNT1#	B44	C/BE1#	A44	AD15
B15	GND	A15	RST#	B45	AD14	A45	+3.3V
B16	CLKB	A16	+5V(I/O)	B46	GND	A46	AD13
B17	GND	A17	GNT0#	B47	AD12	A47	AD11
B18	REQ0#	A18	GND	B48	AD10	A48	GND
B19	+5V(I/O)	A19	REQ2#	B49	GND	A49	AD09
B20	AD31	A20	AD30	B52	AD08	A52	C/BE0#
B21	AD29	A21	+3.3V	B53	AD07	A53	+3.3V
B22	GND	A22	AD28	B54	+3.3V	A54	AD06
B23	AD27	A23	AD26	B55	AD05	A55	AD04
B24	AD25	A24	GND	B56	AD03	A56	GND
B25	+3.3V	A25	AD24	B57	GND	A57	AD02
B26	C/BE3#	A26	GNT2#	B58	AD01	A58	AD00
B27	AD23	A27	+3.3V	B59	+5V(I/O)	A59	+5V(I/O)
B28	GND	A28	AD22	B60	ACK64#	A60	REQ64#
B29	AD21	A29	AD20	B61	+5V	A61	+5V
B30	AD19	A30	GND	B62	+5V	A62	+5V

AGP BUS PIN ASSIGNMENT


AGP Connector (Note: only for AGP 4X/1.5V)

The pin assignments are as follows :

PIN	ASSIGNMENT	PIN	ASSIGNMENT
A1	+12V	A34	VDDQ
A2	TYPEDET	A35	AD22
A3	RESERVED	A36	AD20
A4	USB-	A37	GND
A5	GND	A38	AD18
A6	INTA	A39	AD16
A7	RST	A40	VDDQ
A8	GNT	A41	FRAME
A9	VCC3.3	A42	RESERVED
A10	ST1	A43	GND
A11	RESERVED	A44	RESERVED
A12	PIPE	A45	VCC3.3
A13	GND	A46	TRDY
A14	WBF	A47	STOP
A15	SBA1	A48	PME
A16	VCC3.3	A49	GND
A17	SBA3	A50	PAR
A18	SB_STB	A51	AD15
A19	GND	A52	VDDQ
A20	SBA5	A53	AD13
A21	SBA7	A54	AD11
A22	RESERVED	A55	GND
A23	GND	A56	AD9
A24	RESERVED	A57	C/BE0
A25	VCC3.3	A58	VDDQ
A26	AD30	A59	AD_STB0
A27	AD28	A60	AD6
A28	VCC3.3	A61	GND
A29	AD26	A62	AD4
A30	AD24	A63	AD2
A31	GND	A64	VDDQ
A32	AD_STB1	A65	AD0
A33	C/BE3	A66	RESERVED

PIN	ASSIGNMENT	PIN	ASSIGNMENT
B1	OVRCNT	B34	VDDQ
B2	+5V	B35	AD21
B3	+5V	B36	AD19
B4	USB+	B37	GND
B5	GND	B38	AD17
B6	INTB	B39	C/BE
B7	CLK	B40	VDDQ
B8	REQ	B41	IRDY
B9	VCC3.3	B42	RESERVED
B10	ST0	B43	GND
B11	ST2	B44	RESERVED
B12	RBF	B45	VCC3.3
B13	GND	B46	DEVEL
B14	RESERVED	B47	VDDQ
B15	SBA0	B48	PERR
B16	VCC3.3	B49	GND
B17	SBA2	B50	SERR
B18	SB_STB	B51	C/BE1
B19	GND	B52	VDDQ
B20	SBA4	B53	AD14
B21	SBA6	B54	AD12
B22	RESERVED	B55	GND
B23	GND	B56	AD10
B24	RESERVED	B57	AD8
B25	VCC3.3	B58	VDDQ
B26	AD31	B59	AD_STB0
B27	AD29	B60	AD7
B28	VCC3.3	B61	GND
B29	AD27	B62	AD5
B30	AD25	B63	AD3
B31	GND	B64	VDDQ
B32	AD_STB1	B65	AD1
B33	AD23	B66	RESERVED

TECHNICAL SUMMARY




This section introduce you the maps concisely.

Section includes:

- Block Diagram
- Interrupt Map
- RTC & CMOS RAM Map
- Timer & DMA Channels Map
- I / O & Memory Map

BLOCK DIAGRAM

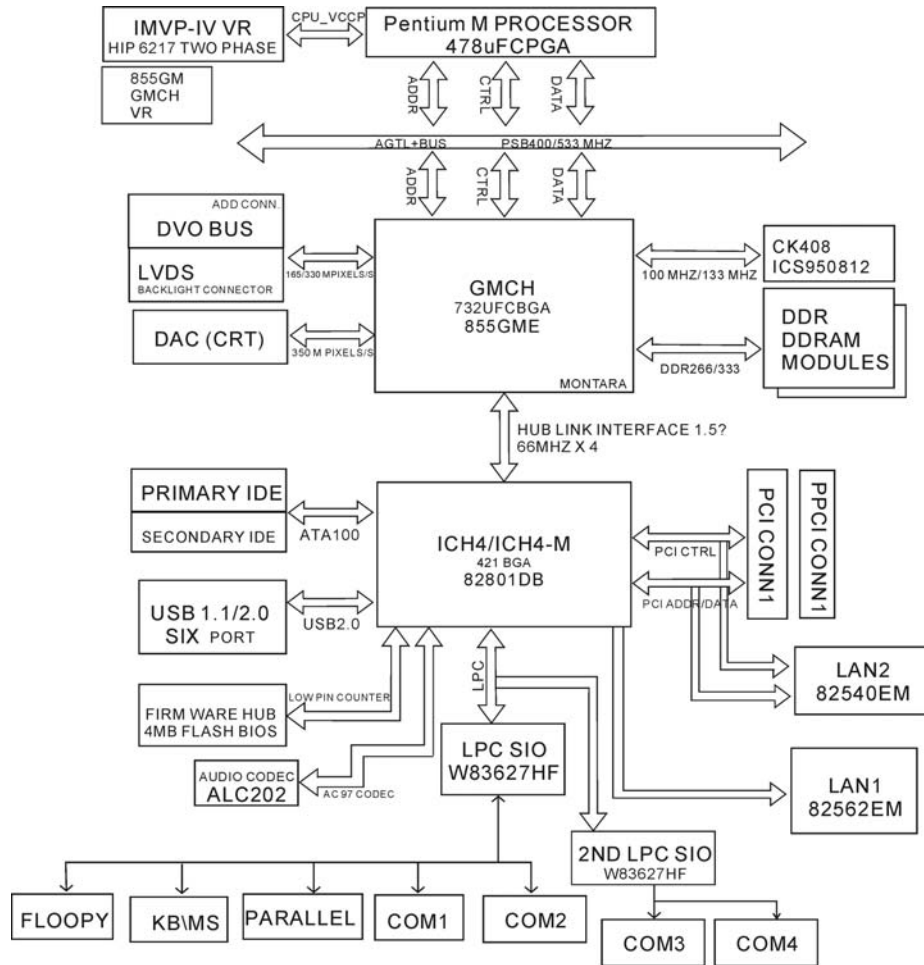

INTERRUPT MAP

IRQ	ASSIGNMENT
0	System TIMER
1	Keyboard
2	Cascade
3	Serial port 2
4	Serial port 1
5	Available
6	Floppy
7	Parallel port 1
8	RTC clock
9	Available
10	Available
11	Available
12	PS/2 Mouse
13	Math coprocessor
14	IDE1
15	IDE2

RTC & CMOS RAM MAP

CODE	ASSIGNMENT
00	Seconds
01	Second alarm
02	Minutes
03	Minutes alarm
04	Hours
05	Hours alarm
06	Day of week
07	Day of month
08	Month
09	Year
0A	Status register A
0B	Status register B
0C	Status register C
0D	Status register D
0E	Diagnostic status byte
0F	Shutdown byte
10	Floppy Disk drive type byte
11	Reserve
12	Hard Disk type byte
13	Reserve
14	Equipment byte
15	Base memory low byte
16	Base memory high byte
17	Extension memory low byte
18	Extension memory high byte
30	Reserved for extension memory low byte
31	Reserved for extension memory high byte
32	Date Century byte
33	Information Flag
34-3F	Reserve
40-7f	Reserved for Chipset Setting Data

TIMER & DMA CHANNELS MAP

Timer Channel Map :

Timer Channel	Assignment
0	System timer interrupt
1	DRAM Refresh request
2	Speaker tone generator

DMA Channel Map :

DMA Channel	Assignment
0	Available
1	Available
2	Floppy
3	Available
4	Cascade
5	Available
6	Available
7	Available

I/O & MEMORY MAP


Memory Map :

MEMORY MAP	ASSIGNMENT
0000000-009FFFF	System memory used by DOS and application
00A0000-00BFFFF	Display buffer memory for VGA/ EGA / CGA / MONOCHROME adapter
00C0000-00DFFFF	Reserved for I/O device BIOS ROM or RAM buffer.
00E0000-00EFFFF	Reserved for PCI device ROM
00F0000-00FFFFFF	System BIOS ROM
0100000-FFFFFFF	System extension memory

I/O Map :

I/O MAP	ASSIGNMENT
000-01F	DMA controller (Master)
020-021	Interrupt controller (Master)
022-023	Chipset controller registers I/O ports.
040-05F	Timer control registers.
060-06F	Keyboard interface controller (8042)
070-07F	RTC ports & CMOS I/O ports
080-09F	DMA register
0A0-0BF	Interrupt controller (Slave)
0C0-0DF	DMA controller (Slave)
0F0-0FF	Math coprocessor
1F0-1F8	Hard Disk controller
278-27F	Parallel port-2
2B0-2DF	Graphics adapter controller
2F8-2FF	Serial port-2
360-36F	Net work ports
378-37F	Parallel port-1
3B0-3BF	Monochrome & Printer adapter
3C0-3CF	EGA adapter
3D0-3DF	CGA adapter
3F0-3F7	Floppy disk controller
3F8-3FF	Serial port-1

TROUBLE SHOOTING



This section outlines the errors may occur when you operate the system. It also gives you the suggestions on solving the problems.

Section includes:

- Trouble Shooting for Error Messages
- Trouble Shooting for POST Code

TROUBLE SHOOTING FOR ERROR MESSAGES

The following information gives you the error messages and the trouble-shooting. Please adjust your systems according to the messages below. And make sure all the components and connectors are in proper position and firmly attached. If the errors still encountered, please contact with your distributor for maintenance.

POST BEEP :

Currently there are two kinds of beep codes in BIOS. One code indicates that a video error has occurred and the BIOS cannot initialize the video screen to display any additional information. This beep code consists of a single long beep followed by two short beeps. The other code indicates that your DRAM error has occurred. This beep code consists of a single long beep repeatedly.

CMOS BATTERY HAS FAILED :

This message informs you that the CMOS battery is no longer functional. The user should replace it.

CMOS CHECKSUM ERROR :

This message informs you that the CMOS is incorrect. This error may have caused by a weak battery. Check the battery and replace if necessary.

DISK BOOT FAILURE, INSERT SYSTEM DISK AND PRESS ENTER :

No boot device was found. This could mean that either a boot drive was not detected or the drive does not contain proper system boot files. Insert a system disk into Drive A: and press < Enter >. If you assumed the system would boot from the hard drive, make sure the controller is inserted correctly and all cables are properly attached. Also make sure the disk is formatted as a boot device. Then reboot the system.

DISKETTE DRIVES OR TYPES MISMATCH ERROR - RUN SETUP :

Type of diskette drive installed in the system is different from the CMOS definition. Run Setup to reconfigure the drive type correctly.

DISPLAY SWITCH IS SET INCORRECTLY :

Display switch on the motherboard can be set to either monochrome or color. This indicates the switch is set to a different setting than indicated in Setup. Determine which setting is correct, and then either turn off the system and change the jumper, or enter Setup and change the VIDEO selection.

DISPLAY TYPE HAS CHANGED SINCE LAST BOOT :

Since last powering off the system, the display adapter has been changed. You must configure the system for the new display type.

EISA CONFIGURATION CHECKSUM ERROR**PLEASE RUN EISA CONFIGURATION UTILITY :**

The EISA non-volatile RAM checksum is incorrect or cannot correctly read the EISA slot. This can indicate either the EISA non-volatile memory has become corrupt or the slot has been configured incorrectly. Also be sure the card is installed firmly in the slot.

EISA CONFIGURATION IS NOT COMPLETE**PLEASE RUN EISA CONFIGURATION UTILITY :**

The slot configure information stored in the EISA non-volatile memory is incomplete.

Note: When either of these errors appear, the system will boot in ISA mode, which allows you to run the EISA Configuration Utility.

ERROR ENCOUNTERED INITIALIZING HARD DRIVE :

Hard drive cannot be initialized. Be sure the adapter is installed correctly and all cables are correctly and firmly attached. Also be sure the correct hard drive type is selected in Setup.

ERROR INITIALIZING HARD DISK CONTROLLER :

Cannot initialize controller. Make sure the cord is correctly and firmly installed in the bus. Be sure the correct hard drive is selected in Setup. Also check to see if any jumper needs to be set correctly on the hard drive.

FLOPPY DISK CNTRLR ERROR OR NO CNTRLR PRESENT :

Cannot find or initialize the floppy drive controller. Make sure the controller is installed correctly and firmly. If there are no floppy drives installed, be sure the Diskette Drive selection in Setup is set to NONE.

INVALID EISA CONFIGURATION

PLEASE RUN EISA CONFIGURATION UTILITY :

The non-volatile memory containing EISA configuration information was programmed incorrectly or has become corrupt. Re-run EISA configuration utility to correctly program the memory.

Note: When this error appears, the system will boot in ISA mode, which allows you to run the EISA Configuration Utility.

KEYBOARD ERROR OR NO KEYBOARD PRESENT :

Cannot initialize the keyboard. Make sure that the keyboard is properly attached and no keys being pressed during the boot.

If you are purposely configuring the system without a keyboard, set the error halt condition in Setup to HALT ON ALL, BUT KEYBOARD. This will cause the BIOS to ignore the missing keyboard and continue the boot.

MEMORY ADDRESS ERROR AT ... :

Indicates a memory address error at a specific location. You can use this location along with the memory map for your system to find and replace the bad memory chips.

MEMORY PARITY ERROR AT ... :

Indicates a memory parity error at a specific location. You can use this location along with the memory map for your system to find and replace the bad memory chips.

MEMORY SIZE HAS CHANGED SINCE LAST BOOT :

Memory has been added or removed since the last boot. In EISA mode use Configuration Utility to reconfigure the memory configuration. In ISA mode enter Setup and enter the new memory size in the memory fields.

MEMORY VERIFY ERROR AT ... :

Indicates an error verifying a value already written to memory. Use the location along with your system's memory map to locate the bad chip.

OFFENDING ADDRESS NOT FOUND :

This message is used in conjunction with the I/O CHANNEL CHECK and RAM PARITY ERROR messages when the segment that has caused the problem cannot be isolated.

OFFENDING SEGMENT :

This message is used in conjunction with the I/O CHANNEL CHECK and RAM PARITY ERROR messages when the segment that has caused the problem has been isolated.

PRESS A KEY TO REBOOT :

This will be displayed at the bottom screen when an error occurs that requires you to reboot. Press any key and the system will reboot.

PRESS F1 TO DISABLE NMI, F2 TO REBOOT :

When BIOS detects a Non-maskable Interrupt condition during boot, this will allow you to disable the NMI and continue to boot, or you can reboot the system with the NMI enabled.

RAM PARITY ERROR – CHECKING FOR SEGMENT :

Indicates a parity error in Random Access Memory.

Should be Empty But EISA Board Found**PLEASE RUN EISA CONFIGURATION UTILITY :**

A valid board ID was found in a slot that was configured as having no board ID.

Note: When this error appears, the system will boot in ISA mode, which allows you to run the EISA Configuration Utility.

Should Have EISA Board But Not Found**PLEASE RUN EISA CONFIGURATION UTILITY :**

The board installed is not responding to the ID request, or no board ID has been found in the indicated slot.

Note: When this error appears, the system will boot in ISA mode, which allows you to run the EISA Configuration Utility.

Slot Not Empty :

Indicates that a slot designated as empty by the EISA Configuration Utility actually contains a board.

SYSTEM HALTED, (CTRL-ALT-DEL) TO REBOOT :

Indicates the present boot attempt has been aborted and the system must be rebooted. Press and hold down the CTRL and ALT keys and press DEL.

Wrong Board in Slot

PLEASE RUN EISA CONFIGURATION UTILITY :

The board ID does not match the ID stored in the EISA non-volatile memory.

Note: When this error appears, the system will boot in ISA mode, which allows you to run the EISA Configuration Utility.

FLOPPY DISK(S) FAIL (80) :

Unable to reset floppy subsystem.

FLOPPY DISK(S) FAIL (40) :

Floppy type mismatch.

Hard Disk(S) Fail (80) :

Hard Disk Drive reset failed.

Hard Disk(S) Fail (40) :

Hard Disk Drive controller diagnostics failed.

Hard Disk(S) Fail (20) :

Hard Disk Drive initialization error.

Hard Disk(S) Fail (10) :

Unable to recalibrate fixed disk.

Hard Disk(S) Fail (08) :

Sector Verify failed.

Keyboard is locked out – Unlock the key :

BIOS detect the keyboard is locked. P17 of keyboard controller is pulled low.

Keyboard error or no keyboard present :

Cannot initialize the keyboard. Make sure the keyboard is attached correctly and no keys are being pressed during the boot.

Manufacturing POST loop :

System will repeat POST procedure infinitely while the P15 of keyboard controller is pull low. This is also used for M/B burn in test.

BIOS ROM checksum error – System halted :

The checksum of ROM address F0000H-FFFFFH is bad.

Memory test fail :

BIOS reports the memory test fail if the onboard memory is tested error.

TROUBLE SHOOTING FOR POST CODES

The lists below indicate you the post codes. Please follow the instruction to adjust your system. If the error still occurred, please contact with your distributor for maintenance.

- CFh** : Test CMOS R/W functionality.
- C0h** : Early chipset initialization
- Disable shadow RAM
 - Disable L2 cache (socket 7 or below)
 - Program basic chipset registers
- C1h** : Detect memory
- Auto-detection of DRAM size, type and ECC
 - Auto-detection of L2 cache (socket 7 or below)
- C3h** : Expand compressed BIOS code to DRAM.
- C5h** : Call chipset hook to copy BIOS block to E000 & F000 shadow RAM.
- 0h1** : Expand the Xgroup codes locating in physical address 1000:0
- 02h** : Reserved.
- 03h** : Initial Superio_Early_Init switch.
- 04h** : Reserved.
- 05h** : 1. Blank out screen
2. Clear CMOS error flag
- 06h** : Reserved
- 07h** : 1. Clear 8042 interface
2. Initialize 8042 self-test

- 08h** : 1. Test special keyboard controller for Winbond 977 series Super I/O Chips.
2. Enable keyboard interface.
- 09h** : Reserved
- 0Ah** : 1. Disable PS/2 mouse interface (optional)
2. Auto detect ports for keyboard & mouse followed by a port & interface swap (optional).
3. Reset keyboard for Winbond 977 series Super I/O chips.
- 0Bh** : Reserved
- 0Ch** : Reserved
- 0Dh** : Reserved
- 0Eh** : Test F000h segment shadow to see whether it is R/W-able or not.
If test fails, keep beeping the speaker.
- 0Fh** : Reserved
- 10h** : Auto detect flash type to load appropriate flash R/W codes into the run time area in F000 for ESCD and DMI support.
- 11h** : Reserved
- 12h** : Use walking 1's algorithm to check out interface in CMOS circuitry. Also set real-time clock power status, and then check for override.
- 13h** : Reserved
- 14h** : Program chipset default values into chipset. Chipset default values are MODBINable by OEM customers.
- 15h** : Reserved
- 16h** : Initial Early_Init_Onboard_Generator switch.

- 17h** : Reserved
- 18h** : Detect CPU information including brand, SMI type (Cyrix or Intel) and CPU level (586 or 686).
- 19h** : Reserved
- 1Ah** : Reserved
- 1Bh** : Initial interrupts vector table. If no special specified, all H/W interrupts are directed to SPURIOUS_INIT_HDLR & S/W interrupts to SPURIOUS_soft_HDLR.
- 1Ch** : Reserved
- 1Dh** : Initial EARLY_PM_INIT switch
- 1Eh** : Reserved
- 1Fh** : Load keyboard matrix (notebook platform)
- 20h** : Reserved
- 21h** : HPM initialization (notebook platform)
- 22h** : Reserved
- 23h** :
1. Check validity of RTC value:
e.g. a value of 5Ah is an invalid value for RTC minute.
 2. Load CMOS settings into BIOS stack. If CMOS checksum fails, use default value instead.
 3. Prepare BIOS resource map for PCI & PnP use. If ESCD is valid, take into consideration of the ESCD's legacy information.
 4. Onboard clock generator initialization. Disable respective clock resource to empty PCI & DIMM slots.
 5. Early PCI initialization:
 - Enumerate PCI bus number
 - Assign memory & I/O resource
 - Search for a valid VGA device & VGA BIOS, and put it into C000:0.

- 24h** : Reserved
- 25h** : Reserved
- 26h** : Reserved
- 27h** : Initialize INT 09 buffer
- 28h** : Reserved
- 29h** :
 - 1. Program CPU internal mtrr (P6 & PII) for 0-640K memory address.
 - 2. Initialize the APIC for Pentium class CPU.
 - 3. Program early chipset according to CMOS setup.
Example: onboard IDE controller.
 - 4. Measure CPU speed.
 - 5. Invoke video BIOS.
- 2Ah** : Reserved
- 2Bh** : Reserved
- 2Ch** : Reserved
- 2Dh** :
 - 1. Initialize multi-language
 - 2. Put information on screen display, including Award title, CPU type, CPU speed ...
- 2Eh** : Reserved
- 2Fh** : Reserved
- 30h** : Reserved
- 31h** : Reserved
- 32h** : Reserved
- 33h** : Reset keyboard except Winbond 977 series Super I/O chips.

34h	:	Reserved
35h	:	Reserved
36h	:	Reserved
37h	:	Reserved
38h	:	Reserved
39h	:	Reserved
3Ah	:	Reserved
3Bh	:	Reserved
3Ch	:	Test 8254
3Dh	:	Reserved
3Eh	:	Test 8259 interrupt mask bits for channel 1.
3Fh	:	Reserved
40h	:	Test 8259 interrupt mask bits for channel 2.
41h	:	Reserved
42h	:	Reserved
43h	:	Test 8259 functionality.
44h	:	Reserved
45h	:	Reserved
46h	:	Reserved
47h	:	Initialize EISA slot

- 48h** : Reserved
- 49h** : 1. Calculate total memory by testing the last double word of each 64K page.
2. Program writes allocation for AMD K5 CPU.
- 4Ah** : Reserved
- 4Bh** : Reserved
- 4Ch** : Reserved
- 4Dh** : Reserved
- 4Eh** : 1. Program MTRR of M1 CPU
2. Initialize L2 cache for P6 class CPU & program CPU with proper cacheable range.
3. Initialize the APIC for P6 class CPU.
4. On MP platform, adjust the cacheable range to smaller one in case the cacheable ranges between each CPU are not identical.
- 4Fh** : Reserved
- 50h** : Initialize USB
- 51h** : Reserved
- 52h** : Test all memory (clear all extended memory to 0)
- 53h** : Reserved
- 54h** : Reserved
- 55h** : Display number of processors (multi-processor platform)
- 56h** : Reserved
- 57h** : 1. Display PnP logo
2. Early ISA PnP initialization
-Assign CSN to every PnP device.

- 58h** : Reserved
- 59h** : Initialize the combined Trend Anti-Virus code.
- 5Ah** : Reserved
- 5Bh** : (Optional Feature)
Show message for entering AWDFLASH.EXE from FDD
(optional)
- 5Ch** : Reserved
- 5Dh** : 1. Initialize Init_Onboard_Super_IO switch.
2. Initialize Init_Onboard_AUDIO switch.
- 5Eh** : Reserved
- 5Fh** : Reserved
- 60h** : Okay to enter Setup utility; i.e. not until this POST stage can users enter the CMOS setup utility
- 61h** : Reserved
- 62h** : Reserved
- 63h** : Reserved
- 64h** : Reserved
- 65h** : Initialize PS/2 Mouse
- 66h** : Reserved
- 67h** : Prepare memory size information for function call:
INT 15h ax=E820h
- 68h** : Reserved
- 69h** : Turn on L2 cache.

- 6Ah** : Reserved
- 6Bh** : Program chipset registers according to items described in Setup and Auto-configuration table.
- 6Ch** : Reserved
- 6Dh** : 1. Assign resources to all ISA PnP devices.
2. Auto assign ports to onboard COM ports if the corresponding item in Setup is set to "AUTO".
- 6Eh** : Reserved
- 6Fh** : 1. Initialize floppy controller.
2. Set up floppy related fields in 40:hardware.
- 70h** : Reserved
- 71h** : Reserved
- 72h** : Reserved
- 73h** : (Optional Feature)
Enter AWDFLASH.EXE if:
- AWDFLASH is found in floppy drive.
- ALT+F2 is pressed
- 74h** : Reserved
- 75h** : Detect & install all IDE devices: HDD, LS120, ZIP, CDROM.....
- 76h** : Reserved
- 77h** : Detect serial ports and parallel ports
- 78h** : Reserved
- 79h** : Reserved
- 7Ah** : Detect and install co-processor

- 7Bh** : Reserved
- 7Ch** : Reserved
- 7Dh** : Reserved
- 7Eh** : Reserved
- 7Fh** : 1. Switch back to text mode if full screen logo is supported.
-If errors occur, report errors and wait for keys
-If no errors occur or F1 key is pressed to continue:
*Clear EPA or customization logo.
- 80h** : Reserved
- 81h** : Reserved
- 82h** : 1. Call chipset power management hook.
2. Recover the text font used by EPA logo (not for full screen logo).
3. If password is set, ask for password.
- 83h** : Save all data in stack back to CMOS.
- 84h** : Initialize ISA PnP boot devices.
- 85h** : 1. USB final initialization.
2. NET PC: Build SYSID structure.
3. Switch screen back to text mode.
4. Setup ACPI table at top of memory.
5. Invoke ISA adapter ROMs.
6. Assign IRQs to PCI devices.
7. Initialize APM.
8. Clear noise of IRQs.
- 86h** : Reserved
- 87h** : Reserved

- 88h** : Reserved
- 89h** : Reserved
- 90h** : Reserved
- 91h** : Reserved
- 92h** : Reserved
- 93h** : Read HDD boot sector information for Trend Anti-Virus code.
- 94h** :
1. Enable l2 cache.
2. Program boot up speed.
3. Chipset final initialization.
4. Power management final initialization.
5. Clear screen and display summary table
6. Program K6 write allocation.
7. Program P6 class write combining.
- 95h** :
1. Program daylight saving.
2. Update keyboard LED and typematic rate.
- 96h** :
1. Build MP table.
2. Build and update ESCD.
3. Set CMOS century to 20h or 19h.
4. Load CMOS time into DOS timer tick.
5. Build MSIRQ routing table.
- FFh** : Boot attempt (INT 19h)

PRINTED IN TAIWAN